


FEATURES

- Rectangle windows technics with soft tinct.
- Single module struct, easy to install.
- Used in measure and display DC value.
- Passive detection.



[Http://www.barmeter.com](http://www.barmeter.com)

DESCRIPTIONS

- **Input Mode:** Voltage, Current
- **Max. Input Over Capability:** 2× Input value
- **Input Resistance Via For Volt Meter :** > 500KΩ
- **Resistance Via For Current Meter :** < 50Ω
- **Measuring Accuracy :** ±2% F.S. ±1Segment
- **Effective Beam Number :** 11Segments
- **Bargraph Length :** 28 mm
- **Bargraph Width :** 4 mm
- **Segment pitch :** 2.8 mm
- **Power Consumption :** ≤ 200mW (F.S.)
- **Environment :** -20~70°C & < 85%RH


ORDER CODE

Bar color	4~6.5V	8.5~12.5V
Red	7011	7012
Green	7021	7022
Yellow	7031	7032

CONNECTION DIAGRAM (J1)

No.	Symbol	Wire color	Definition
1	IN(L)	Black	Input low
2	IN(H)	Red	Input high

DIMENSION

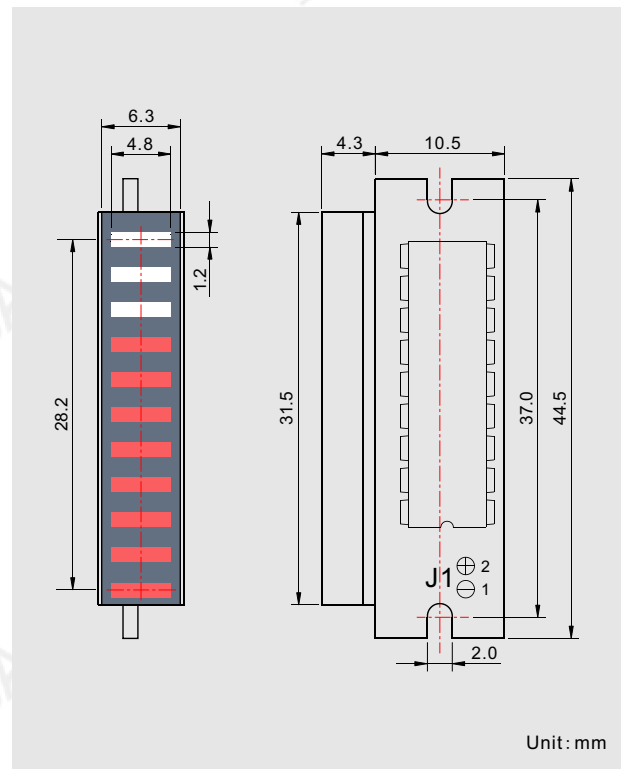

MODEL AND ORDERING CODE

AS111PN-28S **7011**

Order Code (View 'ORDER CODE')

Model