

VF Series of LEDs Bargraph Meter Modules


vu150P-14712S

50 Segments Fixed Color Audio Level Meter Module

VF
S

SUMMARIZE

VF series vu LED bargraph meter modules can accept and interpret audio signal and programme signal which is transmitted by lines and generate audio level for display. The module can achieve vu volume meter's bar display or dot display and level's peak hold is optional. Sensitivity of transmission channel can be adjusted by the parts on module, so display's dynamic range can be adjusted easily. Audio input can connect the signal to the preamplifier(circuit) or power amplifier output port by PH port connector or other two connectors. The signal is sent to the LED bar to display after mean detection, transfer amplification and processed by software. Because of wide impedance match range, the module can be widely used in the display of audio system's audio output, sound console output, programme signal transmitted by lines and volume output by power amplifier. The module has wide range power supply, low power consumption. The bargraph can be a single color, such as red, green, yellow etc. or can be two or more colors to display separately, which represent different function region and improve the visual effect of programme.

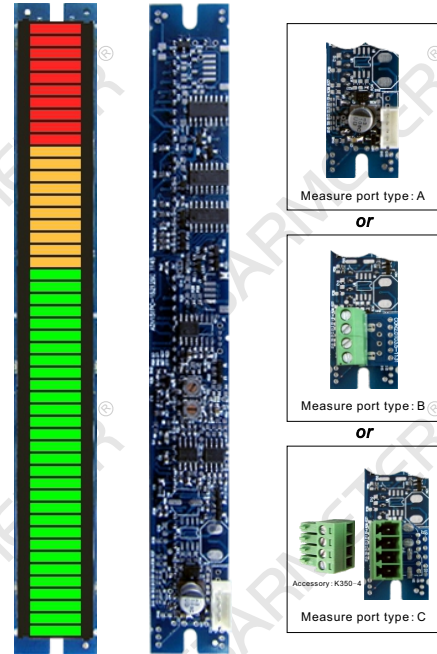

[Http://www.barmeter.com](http://www.barmeter.com)


DESCRIPTIONS

- Input Impedance:** 200kohm,balanced
100kohm,unbalanced
- Output Level For '0' Indication:** +4dBu(at default state)*
- Input Range:** -20vu~+4vu(at default state)
- Amplitude-Frequency Characteristic:** $\pm 0.5\text{vu}$ [31.5Hz~16KHz]
- Sensitivity Adjustment Range:** 3vu
- Response Time:** 300ms $\pm 10\%$
- Peak Hold Time:** 2 s
- Peak Return Time:** 3 s
- Effective Beam Number:** 50 segments
- Bargraph Length:** 147 mm
- Bargraph Width:** 12 mm
- Segment Pitch :** 3.0 mm
- Power Supply and Range :**
 - Non-isolated** Normal: DC5V $\pm 10\%$
Optional: DC12V (10~15V)
DC24V (20~28V)
 - Isolated** DC5V $\pm 5\%$, DC12V $\pm 5\%$, DC24V $\pm 5\%$
Insulating Intension: DC1000V 1min
- Power Consumption:** 700mW(F.S.)
- Environment:** -30~70°C & <85%RH

* default state: the 41th segment is the '0' reference indication, dBu is the decibel unit which take 0.775V as parameter value.

MODEL AND ORDERING CODE

vu150P-14712S **D N 05 C A 7041**

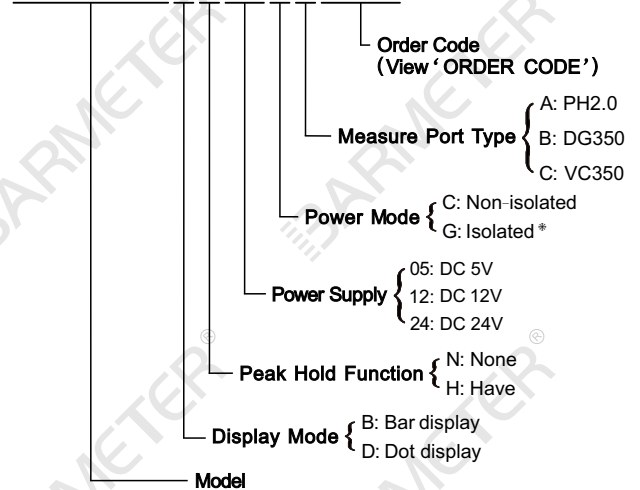

* When choose isolated power mode, signal's unbalanced input(Pin 1 and Pin 2 are common ground) cannot be used.

ORDER CODE

Bar Color	Red	Green	Yellow	40Green+10Red
Order Code	7011	7021	7031	7041
Bar Color	30Green+10Yellow+10Red			
Order Code	7051			

CONNECTION DIAGRAM (J1)

Pin No.	Symbol	Definition
1	PS(-)	Negative Power Supply
2	IN(L)	Audio Input
3	IN(H)	Audio Input
4	PS(+)	Positive Power Supply

VF Series of LEDs Bargraph Meter Modules


vu150P-14712S

50 Segments Fixed Color Audio Level Meter Module

VF

S

DIMENSION

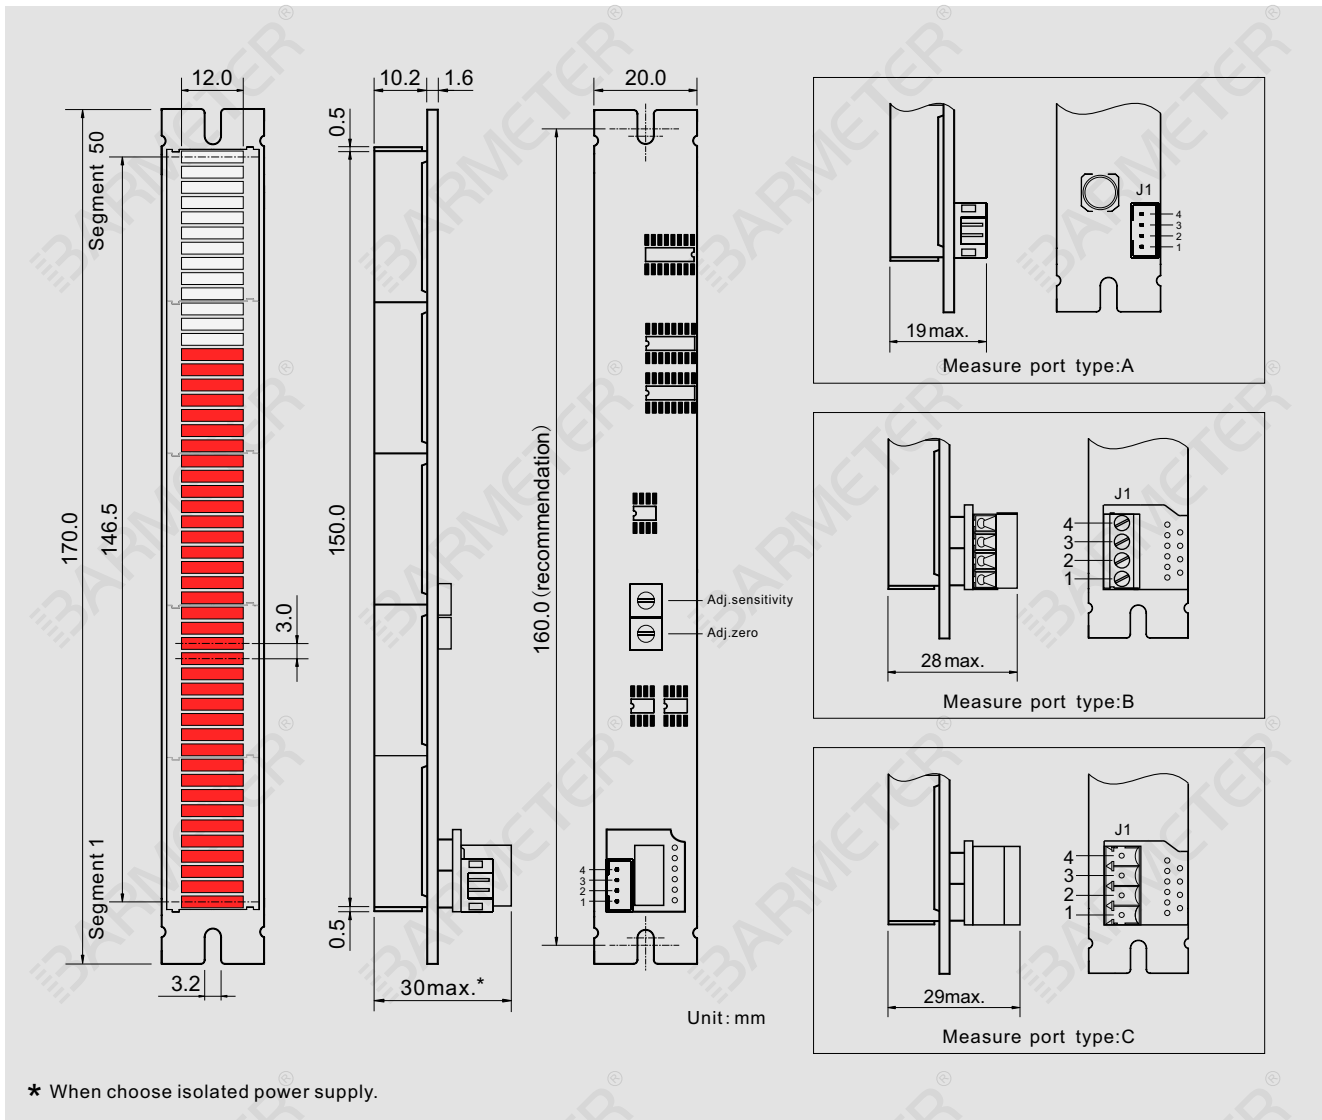

ACCESSORY

CONNECTOR

